

Southern Cross Stainless Steel

KNEE OPERATED HAND BASIN INSTALLATION INSTRUCTIONS

TIME FLOW STOP VALVE SELF CLOSING WITH ADJUSTABLE FLOW RATE

Dimensions subject to manufacturing tolerances—all dimensions in mm.

APPLICATIONS

Any public washroom or showering application that requires self closing, vandal resistant and water saving stop valve.

FEATURE

- MECHANICAL OPERATION
- CARTRIDGE DESIGN FOR EASE OF SERVICE
- INTEGRAL WATER SAVING FLOW ADJUSTMENT
- VANDAL RESISTANT
- EASY PUSH-IN OPERATION


OPERATION

Flow cycle is actuated by depressing button from the rest position. The adjustable flow rate automatically turns off with a non-concussive action after either 15 or 30 seconds, the closing time is not adjustable.

INSTALLATION REQUIREMENTS

Maximum water supply pressure 500kPa
Minimum water supply pressure 50kPa
Single Water supply required either cold or warm water
Temperature: 0 to 60 degree c
Connections: 15mm B.S.P. male inlet & outlet connection.


MODELS AVAILABLE

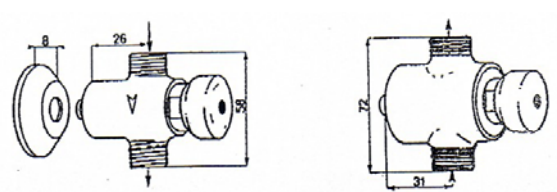

TF747 15 second delayed closure TF749 30 second delayed closure

DRAWING NO: SC104
04/05

IMPORTANT: MAXIMUM WATER
SUPPLY PRESSURE 500kPa



23-27 Clapham Road
Regents Park NSW 2143

Ph: 02 9644 2811
Fx: 02 9645 1114
Email: southerncrossstainless
@bigpond.com